



Københavns Universitet



A tutorial on testing the race model inequality

Gondan, Matthias; Minakata, Katsumi

Published in:

Attention, Perception & Psychophysics

DOI:

[10.3758/s13414-015-1018-y](https://doi.org/10.3758/s13414-015-1018-y)

Publication date:

2016

Document Version

Early version, also known as pre-print

Citation for published version (APA):

Gondan, M., & Minakata, K. (2016). A tutorial on testing the race model inequality. *Attention, Perception & Psychophysics*, 78(3), 723–735. <https://doi.org/10.3758/s13414-015-1018-y>

Attention, Perception, & Psychophysics

A tutorial on testing the race model inequality

Journal:	<i>Attention, Perception, & Psychophysics</i>
Manuscript ID	PP-TR-15-001.R2
Manuscript Type:	Tutorial Review - Invited
Date Submitted by the Author:	23-Oct-2015
Complete List of Authors:	Gondan, Matthias; University of Copenhagen, Department of Psychology Minakata, Katsumi; University of Copenhagen, Department of Psychology
Keywords:	Attention: Divided Attention and Inattention, reaction time methods, Multisensory Processing

SCHOLARONE™
Manuscripts

View Only

The final publication is available at Springer via <http://dx.doi.org/10.3758/s13414-015-1018-y>

A tutorial on testing the race model inequality

Matthias Gondan and Katsumi Minakata

Department of Psychology, University of Copenhagen, Denmark

Running title: RACE MODEL INEQUALITY

Address for Correspondence

Matthias Gondan
Department of Psychology
University of Copenhagen
Øster Farimagsgade 2A
1353 Copenhagen K
Denmark
matthias.gondan@psy.ku.dk

Abstract: 249 words

Manuscript: 38 pages, 11335 words, 2 figures, no tables

Supplementary material: R script, Supplementary tables

*RACE MODEL INEQUALITY***Abstract**

When participants respond in the same way to stimuli of two categories, responses are often observed to be faster when both stimuli are presented together (redundant signals) relative to the response time obtained when they are presented separately. This effect is known as the redundant signals effect. Several models have been proposed to explain this effect, including race models and coactivation models of information processing. In race models, the two stimulus components are processed in separate channels and the faster channel determines the processing time. This mechanism leads, on average, to faster responses to redundant signals. In contrast, coactivation models assume integrated processing of the combined stimuli. To distinguish between these two accounts, Miller (1982) derived the well-known race model inequality, which has become a routine test for behavioral data in experiments with redundant signals. In this tutorial, we review the basic properties of redundant signals experiments and current statistical procedures used to test the race model inequality during the period between 2011 and 2014. We highlight and discuss several issues concerning study design and the test of the race model inequality, such as inappropriate control of Type I error, insufficient statistical power, wrong treatment of omitted responses or anticipations and the interpretation of violations of the race model inequality. We make detailed recommendations on the design of redundant signals experiments and on the statistical analysis of redundancy gains. We describe a number of coactivation models that may be considered when the race model has been shown to fail.

Keywords

Attention: Divided Attention and Inattention; reaction time methods; Multisensory Processing

Redundant signals effect

Redundant signals are typically utilized to ensure that important, broadcast information is conveyed to an operator or user. For example, auditory-visual warning signals (i.e., flashing lights and sirens) are used in ambulances and police vehicles to make certain that drivers stop or yield as they head to their destinations. The use of multimodal redundant signals for alerting systems is imperative because they result in faster and more accurate responses than alerting systems without redundant coding. How does the system integrate the information from the different senses? By testing specific predictions of certain models one can infer the organization and characteristics of human information processing. A classical study of redundant signaling was performed by Hershenson (1962; the very first study with redundant signals has been reported by Todd, 1912, Section IV.2). Hershenson implemented a speeded response time (RT) task where observers had to respond by a keypress whenever they were presented with visual, auditory, or audio-visual stimuli. The redundant, audio-visual signals elicited the lowest mean RT relative to the single signal conditions; this phenomenon is the “redundant signals effect”. Such redundant signals effects have been found across different response demands such as Go/Nogo and Choice RT tasks (Grice & Canham, 1990; Grice, Canham, & Boroughs, 1984; Grice, Canham, & Gwynne, 1984; Grice & Reed, 1992).

While Hershenson’s results refer to simple responses to bimodal stimuli (i.e., of two sensory modalities), redundant signals effects have also been reported for stimuli presented within one sensory modality. If participants are instructed to respond whenever they detect a visual signal, they are faster if two visual signals are presented simultaneously compared to a single-signal presentation (e.g., Corballis, 2002; Miller & Adam, 2006). In the auditory modality, the pattern is more complex (e.g., no redundancy gains with pure tones of equal frequency, Schröter, Ulrich, & Miller, 2007).

RACE MODEL INEQUALITY

1
2
3 Several models explain such redundancy gains. In the so-called race model (Miller,
4 1982) or parallel, first-terminating model (Townsend & Ashby, 1983), the redundancy gain is
5 a consequence of ‘statistical facilitation’ (e.g., Raab, 1962). Detection times for single target
6 stimuli vary from trial to trial based on a statistical distribution. Whenever two target stimuli
7 are presented, the stimulus that is faster processed triggers the response (i.e., this stimulus
8 wins the “race”). As the processing time distributions for the two stimuli usually overlap,
9 slow processing in one channel is compensated by faster processing in the other channel.
10 Consequently, mean RTs for redundant stimuli are faster than mean RTs for single stimuli.

11
12 Instead of separate processing of the two signals, coactivation models assert some
13 kind of integrated processing of the two stimuli. For example, Miller (1982, Appendix)
14 proposed that the activations induced by both stimuli add up and the summed activation
15 enables faster response initiation (‘coactivation model’, see also Miller, 2004; Schwarz, 1989,
16 1994; Diederich, 1995; Townsend & Nozawa, 1995; Blurton, Greenlee, & Gondan, 2014). In
17 order to distinguish between separate processing (race model) and integrated processing
18 (coactivation model), Miller (1982) derived the well-known race model inequality (RMI),
19 which has become a routine test for behavioral data in experiments with redundant signals. If
20 a given data set violates the RMI, separate processing cannot explain the redundancy gain (for
21 details, see below). Consequently, most researchers would then assume the alternative
22 explanation for the given data set (i.e., integrated/“coactive” processing of the two stimuli).

23
24 This article begins with a derivation of the RMI. We then provide a short review of the
25 methods used to test for a violation of the RMI and highlight some of the frequently
26 encountered issues when testing the RMI. We close with a description of coactivation models
27 and two generalizations. For simplicity, the example of redundant signals from the visual and
28 auditory sensory modalities shall be used throughout this article with “A”, “V”, and “AV”
29 denoting the auditory, visual and audio-visual conditions, respectively. Of course, the
30 derivations hold for any other combination of stimuli within or across modalities.
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

*RACE MODEL INEQUALITY***Race model inequality**

The race model is utilized to describe and predict how two or more stimuli may be processed in a redundant signals task. In a typical redundant signals task, three sets of RTs are involved; one for each single-signal stimulus and one for the redundant-signal stimulus. Miller's (1982) original race model assumes that the information that gets passed through these channels is processed separately. In other words, activation from one channel does not accumulate with the activation of the other channel. From this assumption (and another assumption, 'context invariance', see below), the RMI can be derived (Miller, 1982, Ineq. 2) that describes the upper limit of the redundancy gain.

More formally, the race model assumes two channel-specific processing times \mathbf{D}_A , \mathbf{D}_V in the bimodal context. The faster of the two channels is the winner of the race, so the smaller of the two processing times determines the processing time \mathbf{D}_{AV} for the redundant stimulus:

$$\mathbf{D}_{AV} = \min(\mathbf{D}_A, \mathbf{D}_V) \quad (1)$$

Take note that all of these times (\mathbf{D}_A , \mathbf{D}_V and \mathbf{D}_{AV}) refer to the processes within the context of a redundant, audio-visual signal. Most authors use the notation $\{\mathbf{D} \leq t\}$ to describe the event of "fast processing" (i.e., a processing time below or equal to t , e.g., Miller, 1982; Luce, 1986). As easily seen in (1), under the race model assumption, \mathbf{D}_{AV} is below t if either the processing time for the auditory component OR (\cup) for the visual component is below t :

$$\{\mathbf{D}_{AV} \leq t \mid AV\} = \{\min(\mathbf{D}_A, \mathbf{D}_V) \leq t \mid AV\} = \{\mathbf{D}_A \leq t \mid AV\} \cup \{\mathbf{D}_V \leq t \mid AV\}, \quad (2)$$

with " $\mid AV$ " reiterating that in (1) and (2), \mathbf{D}_A , and \mathbf{D}_V refer to the auditory and visual component processing times within the context of a redundant, audio-visual signal.

RACE MODEL INEQUALITY

We now consider the probability $P(\mathbf{D} \leq t)$ for fast processing. An upper bound for the probability of a union of two events as in (2) is given by Boole's inequality,

$P(X \cup Y) \leq P(X) + P(Y)$, which states that the probability for the union of X and Y is always less than or equal to the sum of the probabilities for the individual events. Applying Boole's inequality to the union of the two events in (2) results in

$$P(\mathbf{D}_{AV} \leq t | AV) \leq P(\mathbf{D}_A \leq t | AV) + P(\mathbf{D}_V \leq t | AV), \text{ for all } t. \quad (3)$$

As already noted above, all the probabilities in Inequality 3 refer to the (latent) processing times within the context of a redundant signal. To relate the terms on the left and on the right side of (3) to observable RT distributions, the additional assumption of 'context invariance' (or context independence, Luce, 1986, p. 129) is needed. Context invariance states that the processing times for the auditory component of the redundant signal follow the same distribution as the processing times elicited from a single auditory signal. Likewise, the processing times for the visual component of AV follow the same distribution as the processing times elicited from a single visual signal:

$$P(\mathbf{D}_A \leq t | AV) = P(\mathbf{D}_A \leq t | A), \text{ for all } t, \quad (4A)$$

$$P(\mathbf{D}_V \leq t | AV) = P(\mathbf{D}_V \leq t | V), \text{ for all } t. \quad (4B)$$

Inserting (4) into (3) yields

$$P(\mathbf{D}_{AV} \leq t | AV) \leq P(\mathbf{D}_A \leq t | A) + P(\mathbf{D}_V \leq t | V), \text{ for all } t. \quad (5)$$

Inequality 5 only describes the modality-specific processing times \mathbf{D} under the race model assumption. The observable response time \mathbf{T} also includes residual processes \mathbf{M} , for

RACE MODEL INEQUALITY

example, the finger movement, or, more generally, processes related to response execution, so that $\mathbf{T} = \mathbf{D} + \mathbf{M}$. Assuming that (5) holds for all $\mathbf{M} = m$ (Dzafarov, 2003; Dzafarov, Schweickert, & Sung, 2004),

$$P(\mathbf{D}_{AV} \leq t \mid AV, \mathbf{M} = m) \leq P(\mathbf{D}_A \leq t \mid A, \mathbf{M} = m) + P(\mathbf{D}_V \leq t \mid V, \mathbf{M} = m), \text{ for all } t, m,$$

the inequality is directly translated to observable RT distributions,

$$P(\mathbf{T}_{AV} \leq t) \leq P(\mathbf{T}_A \leq t) + P(\mathbf{T}_V \leq t), \text{ for all } t, \quad (6A)$$

The upper bound (6A) is the well-known RMI (Miller, 1982; for a *lower* bound, see Grice, Canham & Gwynne, 1984). Inequality 6 is usually written compactly using the notation for the cumulative RT distribution function $F(t) = P(\mathbf{T} \leq t)$,

$$F_{AV}(t) \leq F_A(t) + F_V(t), \text{ for all } t. \quad (6B)$$

Hence, under the race model, the cumulative RT distribution for AV is always either equal to or below (see Figure 1) the summed distributions from the single auditory signal (A) and the single visual signal (V). Because cumulative distributions are monotonically increasing, an equivalent prediction is that the RT distribution for AV is equal to or to the right of the summed distributions for the single signals A and V. When the RMI is violated at some t , it is because the race model is the wrong model (Eq. 1 above), the context invariance assumption is untenable (Eqs. 4A and 4B), or both. In many studies context invariance is assumed to hold, and a violation of the RMI is used as a synonym for “coactivation”.

Note that Boole’s law (Inequality 3) does not require the channel processing times \mathbf{D}_A , \mathbf{D}_V to be stochastically independent. Therefore, the RMI is consistent with a scenario in which

RACE MODEL INEQUALITY

the participant concentrates on the auditory channel in a given trial (D_A will be lower, at the expense of D_V), and on the visual channel in another trial. If the channel processing times were independent, the race model would predict an equality,

$$F_{AV}(t) = F_A(t) + F_V(t) - F_A(t) \cdot F_V(t), \text{ for all } t. \quad (7)$$

We mention this here because Equation 7 is sometimes used in studies with redundant signals (e.g., Stevenson et al., 2014; see also review section below). We do not recommend using it because we think that the assumption of channel independence is poorly motivated.

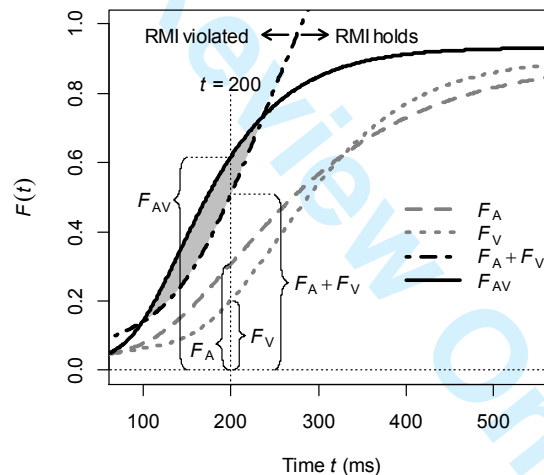


Figure 1.

Cumulative distribution functions $F(t)$ of RTs for auditory, visual, and auditory-visual stimuli, as well as the sum of the distributions for A and V ($F_A + F_V$). According to the race model inequality, F_{AV} should always be below/to the right of $F_A + F_V$. In this example, the inequality is violated, for example, at $t = 200$ ms, because $F_{AV}(200)$ is above $F_A(200) + F_V(200)$. The violation occurs within the range illustrated by the shaded area. Two features of the curves should be noted: Because there might be a tendency to guess the onset of the stimulus especially in simple response tasks, a number of very fast “responses” might occur, so that $F(t)$ is already above zero for $t = 100$ ms. Similarly, the $F(t)$ do not seem to tend to one at the upper limit of the RT window; this happens because some stimuli might be overlooked.

RACE MODEL INEQUALITY

1
2
3 The cumulative distribution functions in (6A/6B) relate to theoretical probabilities
4 which are not seen in an experiment. However, experimental data can be used to obtain
5 empirical estimates $\hat{G}(t)$ for these probabilities. $\hat{G}(t)$ is given by the proportion of RTs below t
6
7 in a specific experimental condition. These estimates can then be used to test whether the
8
9 RMI holds or not in a given experimental task.
10
11
12
13
14
15

Testing the RMI

16
17
18
19 In RT studies in Experimental Psychology hypothesis tests generally refer to differences in
20 the mean RT observed under two or more experimental conditions. Most often, the “mean
21 correct RT” is determined for the subset of correct responses that fall within some predefined
22 response window, and a paired t -test or an analysis of variance is used to test whether
23 response speed in one condition differs from the other condition. The theoretical prediction
24 usually corresponds to the alternative hypothesis, so that a significant difference in mean RTs
25 is taken as support for the theory.
26
27
28
29
30
31
32
33
34

35 For the RMI (Ineq. 6), the situation differs from this standard scenario in several
36 aspects: (A) The RMI does not refer to mean RT or mean correct RT within a specific time
37 window, but to the RT distribution $F(t)$, that is, the probability that a response occurs within
38 time t under the respective experimental condition. (B) The RMI refers to RTs for three
39 experimental conditions instead of two, and the inequality is asymmetric, with one term on
40 the left hand side, and two terms on the right hand side of the inequality. (C) The RMI is
41 defined for all t , so violations may occur at any t . (D) The race model describes a mechanism,
42 namely, separate, context-invariant processing of the redundant information provided by the
43 two channels. Violation of the RMI rules out this mechanism, but does not automatically
44 support a specific alternative cognitive architecture. As a consequence of these four aspects,
45 the test of the RMI is somewhat special—with special requirements for study design,
46 preprocessing of the data, and statistical testing as well as the interpretation of the results.
47
48
49
50
51
52
53
54
55
56
57
58
59
60

RACE MODEL INEQUALITY

Conversely, blind application of standard methods can lead to biased results and wrong conclusions.

In this section we describe the most commonly used method that has been proposed for testing the RMI in a group of participants (Miller, 1982). For tests of single-participant data, see Miller (1986) and Maris and Maris (2003). We then focus on whether and how the method is affected by Issues A–D mentioned above and suggest ways to improve study design, analysis, and interpretation of the results.

The RMI can be tested by applying paired t -tests to compare the empirical cumulative distribution functions $\hat{G}(t)$ of RTs for A, V, and AV at prespecified time points or quantiles. While the RMI refers to the theoretical probabilities $F(t)$, the observed proportion of responses below t is denoted by $\hat{G}(t)$. The test involves three steps (Ulrich, Miller, & Schröter, 2007): (1) $\hat{G}_A(t)$, $\hat{G}_V(t)$ and $\hat{G}_{AV}(t)$ are determined as the number of RTs below or equal to t , divided by the number of trials. (2) Then the sum of the distributions for auditory and visual stimuli is computed, $\hat{G}_{A+V}(t) = \hat{G}_A(t) + \hat{G}_V(t)$. (3) Each participant now provides a pair of proportions $\hat{G}_{AV}(t)$ and $\hat{G}_{A+V}(t)$ for a given t . For reasonably large numbers of trials, such proportions tend to Normal distributions, and so does their difference, therefore, the proportions can be compared using paired t -tests. If $\hat{G}_{AV}(t)$ is significantly *above* $\hat{G}_{A+V}(t)$ at any t , the race model is rejected (“vertical” test, see Figure 1 for an illustration at $t = 200$ ms).

Most often, a slightly more complicated procedure (“horizontal test”) is chosen that involves one additional step. Remember that the RMI states that $F_{AV}(t)$ is *below* $F_A(t) + F_V(t)$, for all t . However, because the $F(t)$ are monotonically increasing, the RMI equivalently states that F_{AV} is to the *right* of $F_A + F_V$ on its entire course (see Figure 1 for an illustration). The latter statement refers to the inverse distributions (quantile functions). F and \hat{G} are functions of time that return probabilities/proportions (e.g., $F_V(200 \text{ ms}) \approx 20\%$ in Figure 1). The inverses F^{-1} and \hat{G}^{-1} are functions of probabilities/proportions that return times [$F_V^{-1}(20\%) \approx 200 \text{ ms}$]. Therefore, $\hat{G}_{AV}^{-1}(p)$ and $\hat{G}_{A+V}^{-1}(p)$ are estimated for some prespecified

RACE MODEL INEQUALITY

set of p . Each participant then provides a pair of quantiles $\hat{G}^{-1}_{AV}(p)$ and $\hat{G}^{-1}_{A+V}(p)$ for a given p . If the sample size is large enough, the quantiles follow approximate Normal distributions (Bahadur, 1966), so that the pairs can be compared using paired t -tests. If $\hat{G}^{-1}_{AV}(p)$ is significantly to the left of $\hat{G}^{-1}_{A+V}(p)$ at any p , the race model is rejected.

It is unclear whether the horizontal test or the vertical test is more powerful. Both variants can be adjusted to the response speed of the individual participants (see below), and other measures violation have been suggested (e.g., Colonius & Diederich, 2006). Regardless of the specific procedure, the probabilities or time points at which the test is performed should be carefully selected. For example, Miller (1982) used a horizontal test with $p = 5\%$, 15% , 25% , etc.

Analysis issues

In the following, we discuss the prerequisites for a proper test of the RMI, and we outline solutions for some typical problems in experimental research with redundant signals. As already mentioned above, the test of the RMI is special in the senses that (A) it refers to RT distributions instead of mean RTs, (B) it is asymmetric with only one term on the left, but two terms on the right, and (C) it includes significance tests at multiple time points or quantiles. We now turn to these aspects in more detail.

Estimation of distribution functions and quantiles—We first consider a scenario in which accuracy is 100%. When the time point t is held fixed at a certain value (e.g., $t = 200$ ms), the proportion $\hat{G}(t)$ of RTs below or equal to t (i.e., the number of RTs $\leq t$ divided by the number of trials n in the respective condition) is an unbiased estimate of the underlying probability $F(t) = P(T \leq t)$. It is, therefore, relatively easy to obtain the numerical estimates $\hat{G}_A(t)$, $\hat{G}_V(t)$, and $\hat{G}_{AV}(t)$ for the different t . For the horizontal test, it is slightly more difficult to obtain unbiased percentile estimates $\hat{G}^{-1}(p)$: basically, one needs to find the time t at which $\hat{G}(t)$

RACE MODEL INEQUALITY

crosses a certain level p (see Hyndman & Fan, 1996, for an overview of software solutions).

Bias might occur in small trial numbers, but simulations have shown that the bias is minimal and manifests only if the sample is exceptionally small (Kiesel, Miller & Ulrich, 2007).

Errors and fast guesses—In many RT experiments, it is possible to anticipate the onset of the next upcoming stimulus to some extent. Especially in simple response tasks, it might happen that highly motivated participants press the response button before the stimulus actually appeared. In such a situation, the RT is negative and, of course, such fast guesses are easily identified. However, for very fast responses of, say, 120 ms after stimulus onset, it is actually unclear whether they reflect informed responses or just fast guesses that happily coincided with the onset of the next stimulus. Eriksen (1988) noticed that due to the asymmetry of the RMI, fast guesses can bias the test of the RMI. Although he described a procedure for choice responses (see Ineq. 10 below), his argument applies for both simple and choice response tasks: Assuming that fast guesses occur equally in all conditions (A, V, AV), they lead to an increase of all distribution functions involved (cf. Figure 1). However, on the left-hand side of Inequality 6, only $F_{AV}(t)$ is increased. In contrast, on its right-hand side, both $F_A(t)$ and $F_V(t)$ are increased. Because the right-hand side is more affected by fast guesses than the left-hand side, it is more difficult to identify violations of the RMI. In other words, with fast guesses, the test of the RMI is biased, which might result in a considerable loss of statistical power (Miller & Lopes, 1991). Eriksen assumed a simple two-state model of fast guesses and informed responses ('guess' with probability g , 'response' with probability $1 - g$, Ollman, 1966). Based on this argument a refined test of the RMI can be constructed by inserting catch trials (C) in the stimulus sequence in which the RTs to no-stimulus events are recorded (these must be fast guesses). The onset of this event ($t = 0$) is defined as for the other stimulus; it is the time point at which a stimulus would have been presented. The distribution of fast guesses

RACE MODEL INEQUALITY

$F_G(t)$ equally contaminates the RT distributions for A, V, AV and C. Denote the contaminated distributions by $F^*(t)$ ¹. Then,

$$F^*_A(t) = g F_G(t) + (1 - g) F_A(t)$$

$$F^*_V(t) = g F_G(t) + (1 - g) F_V(t)$$

$$F^*_{AV}(t) = g F_G(t) + (1 - g) F_{AV}(t)$$

$$F^*_C(t) = g F_G(t).$$

Therefore, a refined test of the RMI is obtained if the RT distribution for catch trials $F^*_C(t)$ is subtracted from the RT distributions for A, V and AV:

$$[F^*_{AV}(t) - F^*_C(t)] \leq [F^*_A(t) - F^*_C(t)] + [F^*_V(t) - F^*_C(t)], \text{ for all } t.$$

The above expression is easily seen to reduce to

$$F^*_{AV}(t) + F^*_C(t) \leq F^*_A(t) + F^*_V(t), \text{ for all } t. \quad (8)$$

Inequality 8 is the so-called kill-the-twin correction (see Eriksen, 1988, for more details).

Gondan and Heckel (2008) showed that Inequality 8 is not restricted to a two-state model of guess and response, but also follows from a more general “deadline model” (Yellott, 1971) in which guess and response tendencies coexist in parallel. Because of the symmetry of (8), biases due to fast guesses cancel out, and the power to detect a violation of the RMI is increased (Miller & Lopes, 1991). For Go/Nogo and choice responses, the kill-the-twin correction looks slightly different (see Ineq. 10 below).

¹ Strictly speaking, only these contaminated RTs distributions are observable in an experiment. To avoid cumbersome notation, the stars are omitted in the sections that follow.

RACE MODEL INEQUALITY

Omitted responses and outliers—In most RT experiments, there is a minimum and a maximum allowed RT for each stimulus (e.g., between $t_1 = 100$ ms and $t_2 = 1000$ ms after stimulus onset). Responses outside of this window are considered anticipations and omitted responses, respectively, and are generally excluded from the RT analysis. For the test of the RMI, this procedure is wrong and results again in a loss of statistical power. The RMI refers to the probability that a response occurred within t , unconditionally. It does *not* refer to conditional probabilities $F(t | t_1 \leq \mathbf{T}_{AV} \leq t_2)$; and it is not possible to derive a prediction like

$$F_{AV}(t | 100 \leq \mathbf{T}_{AV} \leq 1000) \leq F_A(t | 100 \leq \mathbf{T}_A \leq 1000) + F_V(t | 100 \leq \mathbf{T}_V \leq 1000)$$

from the race model assumption (see also Miller, 2004, Appendix A). We have dealt with anticipations in the previous paragraph and concluded that they should not be excluded from the data, but instead the kill-the-twin correction should be applied. Similarly, slow responses and omitted responses should not be excluded from the analysis. Consider the following example data: three RTs below 500 ms, five RTs between 501 ms and 1000 ms, and two omitted responses. In three out of ten trials the participant responded within 500 ms, so $\hat{G}(500 \text{ ms}) = 30\%$. It would be wrong to exclude the omitted responses and estimate this probability to $3/8 = 37.5\%$.

By default, omitted responses indicate that the participant did not detect the stimulus within some time limit. Data cleaning should be limited to those trials of an experiment in which the participant was distracted (this may include trials with omitted responses as well as trials with valid RTs). When estimating $P(\mathbf{T} \leq t)$, omitted responses should be assigned an infinitely long RT (or any value above the maximum of the RT window). As a consequence, the distribution functions $F(t)$ and their estimates $\hat{G}(t)$ do not necessarily tend to 0% and 100% at the boundaries of the RT window (Figure 1). This holds for $\hat{G}_A(t)$, $\hat{G}_V(t)$, $\hat{G}_{AV}(t)$, and, of course, for the distribution of spontaneous responses in catch trials $\hat{G}_C(t)$.

RACE MODEL INEQUALITY

1
2
3 *A permutation test for multiple time points*—The RMI is predicted to hold for all t , so it may
4 be violated at any t . Therefore, multiple t -tests are used to test the RMI at different time points
5 or quantiles, and the race model is rejected if the test is significant for at least one of them.
6
7 Such a multiple test procedure requires some control of the significance level. Kiesel et al.
8 (2007) showed that running multiple t -tests results in a serious accumulation of the Type I
9 error. On the other hand, a Bonferroni correction would be too conservative because the tests
10 at the different time points are positively correlated.

11
12 Permutation tests provide an elegant way to control for the overall Type I error in
13 multiple significance tests (e.g., Pesarin, 2001). Here we describe a permutation
14 test/randomization test for the RMI proposed by Gondan (2010). Suppose that data has been
15 collected for N participants, and Inequality 8 is tested at t_0 (e.g., $t_0 = 200$ ms); this will be
16 generalized to multiple time points below. In the paired t -test, the test statistic reads as

$$T = \bar{d}(t_0) / \text{se}[\bar{d}(t_0)], \quad (9)$$

17
18 with $\bar{d}(t_0) = 1 / N \times \sum_i d_i(t_0)$ and $\text{se}[\bar{d}(t_0)]$ denoting the mean and the empirical standard error
19 of the differences $d_i(t_0) = \hat{G}_{AV,i}(t_0) + \hat{G}_{C,i}(t_0) - \hat{G}_{A,i}(t_0) - \hat{G}_{V,i}(t_0)$ for each participant i . At the
20 boundary between the null hypothesis and the alternative hypothesis, the RMI turns into an
21 equality, $F_{AV}(t_0) + F_C(t_0) = F_A(t_0) + F_V(t_0)$, so that the left side and the right side are
22 *exchangeable*. In other words, under the null hypothesis, the sign of $d_i(t_0)$ is random in each
23 participant. This property is used in a permutation test to generate the distribution of the test
24 statistic under the null hypothesis. In each simulation, the $d_i(t_0)$ are randomly signed,
25 $d_i^*(t_0) = \pm d_i(t_0)$, and the test statistic is calculated: $T^* = \bar{d}^*(t_0) / \text{se}[\bar{d}^*(t_0)]$. This procedure is
26 repeated, for example, 10,001 times, resulting in a distribution of 10,001 T^* values simulated
27 under the assumption of the race model. Similar to a standard one-sided significance test, the
28 race model is rejected at $\alpha = 5\%$ if the observed T is greater than 95% of the simulated T^* .
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

RACE MODEL INEQUALITY

Generalization of this permutation test to multiple time points is straightforward. We illustrate this for three time points, t_1 , t_2 and t_3 , resulting in three differences $d_i(t_1)$, $d_i(t_2)$, $d_i(t_3)$ for each participant i , as well as three test statistics T_1 , T_2 , T_3 . In each simulation, a single multiplier, $s_i^* = \pm 1$, is chosen at random for each participant i and is multiplied with the difference values, $d_i^*(t_1) = s_i^* \times d_i(t_1)$, $d_i^*(t_2) = s_i^* \times d_i(t_2)$, and $d_i^*(t_3) = s_i^* \times d_i(t_3)$. Separate T^* statistics are then calculated for the three time points, and the largest of the three T is chosen, $T_{\max}^* = \max(T_1^*, T_2^*, T_3^*)$. This is the so-called T_{\max} statistic. The race model is rejected at the one-sided significance level $\alpha = 5\%$ if the maximum of the observed T values, $T_{\max} = \max(T_1, T_2, T_3)$, is greater than 95% of the simulated T_{\max}^* values.

This permutation procedure is known to control the Type I error in correlated significance tests. It has been repeatedly used for multivariate significance tests, for example, to test for differences in EEG waveforms (Blair & Karnisky, 1993). Gondan (2010, Table 1) simulated different scenarios to investigate the power of the permutation test. Because the tests at the different time points are highly correlated, the better control of the Type I error does not come at the price of a substantially reduced statistical power.

The time points t_1 , t_2 , t_3 etc. can be adjusted to the participant's individual response speed. To this end, the percentiles $t_{1,i} = \hat{G}_i^{-1}(5\%)$, $t_{2,i} = \hat{G}_i^{-1}(10\%)$, $t_{3,i} = \hat{G}_i^{-1}(15\%)$ etc. are determined separately for each participant i , using the RTs of all conditions mixed together. The permutation test is then performed using the differences $d_i(t_{1,i})$, $d_i(t_{2,i})$, $d_i(t_{3,i})$, obtained at these individually determined time points. We recommend to test the RMI in the lower percentile range. For large t , the left-hand side of the RMI tends to 1, whereas the right-hand side tends to 2, so the RMI cannot be violated for large t . The supplemental material to this article includes scripts written in R (R Core Team, 2015) which perform these computations at quantiles 5%, 10%, 15%, ..., 45%. The choice of the specific quantiles is somehow arbitrary; whichever quantiles are chosen, they should be specified *a priori*. If the quantiles are chosen after inspection of the data, the significance level will not be protected.

Study design

Redundant signals experiments should be carefully designed to enable efficient analysis of the processing architecture. Of course, the experimental setup is determined by the primary research hypothesis. Here we assume that the primary interest is whether the RMI holds or not, and we outline a minimalistic experimental setup with a simple response task that allows for a reliable and valid estimation of the respective RT distributions.

Random presentation—The stimuli of the different modalities should always be presented in random order; they should never be presented in separate blocks unless there are really good reasons for it. In non-technical terms, the context invariance assumption (Eq. 4) states that the participants “do the same” in all conditions. When stimuli of different modalities are presented in separate blocks, the participants are encouraged to do different things. For example, a participant might decide to close the eyes in a block with only A or AV stimuli in order to better ‘concentrate’ on the auditory stimuli. The same participant would obviously follow another strategy in the block with the visual stimuli. This exaggerated, but plausible, example makes clear that blocked stimulus presentation almost surely leads to a violation of the context invariance assumption, which invalidates the whole derivation of the RMI. A similar problem arises in so-called pseudo-randomized stimulus sequences: Many studies use stimulus sequences in which specific conditions are not presented more than three times in a row (e.g., mandatory shift of the modality after V—V—V). In such sequences it cannot be ruled out that motivated participants will become aware of this experimental strategy and prepare for modality shifts, which again violates the assumption of context invariance, and makes it difficult interpret a violation or non-violation of the RMI.

On the other hand, random stimulus sequences might produce artificial redundancy gains. In random stimulus sequences, modality shifts are known to produce longer response latencies (e.g., Spence, Nicholls & Driver, 2001). Because modality shifts affect only the

RACE MODEL INEQUALITY

1
2
3 unimodal conditions they might result in apparent coactivation because they do not occur in
4
5 redundant stimuli. Therefore, several authors (e.g., Mozolic, Hugenschmidt, Pfeiffer &
6
7 Laurienti, 2009; Otto & Mamassian, 2012; Van der Stoep, Van der Stigchel, & Nijboer, 2015)
8
9 presented sensitivity analyses that are based on the subset of stimuli that are free of modality
10
11 shifts (e.g., A—A, V—V, AV—AV, e.g. Gondan, Lange, Rösler & Röder, 2004), or stimuli
12
13 that follow a specific modality (A—A, A—V, A—AV, e.g., Miller, 1986).
14
15

16
17
18 *Minimizing fast guesses and controlling for them*—In the standard redundant signals task with
19
20 simple responses, there are three stimulus conditions (A, V, and AV). A response is executed
21
22 on each trial, which induces a tendency to anticipate the stimuli. Therefore, the target stimuli
23
24 should not be presented in a fixed rhythm. Instead, the prestimulus period should be random,
25
26 with the duration preferably sampled from an exponential distribution (see Luce, 1986, for an
27
28 excellent introduction to this topic). Many studies sample from a uniform distribution instead.
29
30 A uniform distribution, however, raises expectations, especially at its end: If the duration of
31
32 the prestimulus period is sampled from a uniform distribution between 1000 and 2000 ms,
33
34 and a stimulus has not appeared for 1900 ms, the participant can be sure that the stimulus will
35
36 appear immediately and will be tempted to anticipate it. As a general rule, everything that
37
38 makes the stimulus sequence foreseeable should be avoided unless the researcher is
39
40 particularly interested in sequence effects and expectations.
41
42
43

44
45 Researchers should always consider using catch trials (i.e., trials with no stimulus, C)
46
47 in redundant signals tasks with simple responses and randomly mix them in the stimulus
48
49 sequence. Catch trials, by instruction, discourage participants from fast guesses. If fast
50
51 guesses occur nevertheless, it is possible to estimate the guessing tendency from the
52
53 ‘responses’ to catch trials [i.e., $\hat{G}_C(t)$] and use Inequality 8—thereby automatically applying
54
55 the aforementioned kill-the-twin correction to eliminate guessing bias.
56
57
58
59
60

RACE MODEL INEQUALITY

1
2
3 *Power and sample size*—Consider a test of the RMI at a single time point t_0 . If the sample
4
5 size n is large enough, the proportion of responses below t_0 , $\hat{G}(t_0)$ follows an approximate
6
7 Normal distribution with expectation $\mu = F(t_0)$ and variance $\sigma^2 = F(t_0) \times [1 - F(t_0)] / n$. Let
8
9 $n = 50$ trials per condition. We assume that the RMI is violated, that is, the alternative
10
11 hypothesis holds, with $F_{AV}(t_0) = 0.20$, $F_A(t_0) = 0.10$, and $F_V(t_0) = 0.05$. For simplicity, we
12
13 assume that the participants do not anticipate, so that $F_C(t_0)$ is zero. The difference between
14
15 the three proportions $d(t_0) = \hat{G}_{AV}(t_0) - \hat{G}_A(t_0) - \hat{G}_V(t_0)$ is then approximately Normally
16
17 distributed,
18
19

$$\hat{G}_{AV}(t_0) \sim N(\mu_{AV} = 0.20, \sigma_{AV}^2 = 0.20 \times 0.80 / 50 = 0.003)$$

$$\hat{G}_A(t_0) \sim N(\mu_A = 0.10, \sigma_A^2 = 0.10 \times 0.90 / 50 = 0.002)$$

$$\hat{G}_V(t_0) \sim N(\mu_V = 0.05, \sigma_V^2 = 0.05 \times 0.95 / 50 = 0.001)$$

$$d(t_0) \sim N(\mu_{diff} = \mu_{AV} - \mu_A - \mu_V = 0.05, \sigma_{diff}^2 = \sigma_{AV}^2 + \sigma_A^2 + \sigma_V^2 = 0.006).$$

20
21
22
23
24
25
26
27
28
29
30
31
32
33
34 In the paired t -test all participant-specific RMI differences are essentially added up,
35
36 standardized and compared to zero. If the experiment is run with $N = 20$ participants (indexed
37
38 by i), the approximate power of the RMI test at the one-tailed $\alpha = 5\%$ is easily obtained,
39
40
41

$$\sum_i d_i(t_0) \sim N(\mu_{all} = N \times \mu_{diff} = 1.00, \sigma_{all}^2 = N \times \sigma_{diff}^2 = 0.119),$$

$$\sum_i d_i(t_0) / \sigma_{all} \sim N(2.90, 1)$$

42
43
44
45
46
47
48
49
50 This number is above $z_{0.95}$ with a probability of about 90%. The power estimate is slightly too
51
52 optimistic (e.g., z -approximation instead of the t -distribution, absence of fast guesses, test at a
53
54 single percentile instead of permutation test, assumption of a quite large RMI violation at the
55
56 same quantile or time point in each participant), but it illustrates that redundant signals
57
58 experiments should be undertaken with enough participants and enough trials per condition.
59
60

RACE MODEL INEQUALITY

1
2
3 Whereas the above design aspects could be considered as mandatory, we now outline
4 some ways to make the experiment more “interesting” from the researcher’s point of view. By
5 manipulating the strength of the stimuli, their relative onset, and the task requirements, one
6 can get insight into the mechanisms underlying the integration of redundant information.
7
8
9
10

11
12
13 *Go/Nogo and choice response tasks*—In many redundant signals experiments, participants
14 make simple responses to A or V stimuli or AV stimuli (e.g., Miller, 1986). The conclusions
15 that can be drawn from such a basic experimental setup are, of course, limited (Miller, 1982).
16 For example, researchers might wish to discern if redundancy gains indeed reflect some kind
17 of “integration” of the response mappings at the decisional stage, as proposed by some
18 coactivation models (e.g., Feintuch & Cohen, 2002). Alternatively, do redundancy gains
19 merely result from a speeding of RTs because the increased stimulus energy with multiple
20 stimuli leads to higher “arousal” (Nickerson, 1973; Posner, Nissen & Klein, 1976)? The
21 simple response task cannot distinguish these two underlying mechanisms.
22
23
24
25
26
27
28
29
30
31
32

33
34 To eliminate the possibility of generally higher arousal due to multiple stimuli in the
35 redundant signal condition, some studies have used target (+) and non-target (–) stimuli in
36 each modality, yielding the four stimulus types A^-V^- , A^+V^- , A^-V^+ , A^+V^+ , with A^-V^- acting
37 as the catch trial and A^+V^+ being the redundant stimulus (e.g., Gondan, Niederhaus, Rösler &
38 Röder, 2005; Gondan et al., 2010; Grice & Reed, 1992; Exp. 4 in Miller, 1982; Otto &
39 Mamassian, 2012; Schröger & Widmann, 1998). The intensity of the overall stimulation can
40 be kept constant across the experimental conditions. The redundancy gain corresponds to the
41 difference between mean RTs for A^+V^+ and the mean RTs for A^+V^- and A^-V^+ alone.
42
43 However, the interpretation of the redundancy gains is difficult because response conflicts
44 may occur in A^+V^- and A^-V^+ (respond to A^+ , but withhold the response in V^-) and may slow
45 down the responses in these two conditions. Artificial redundancy gains may arise because
46 A^+V^+ is obviously free of response conflicts (Fournier & Eriksen, 1990). For example, Grice
47
48
49
50
51
52
53
54
55
56
57
58
59
60

RACE MODEL INEQUALITY

and Reed (1992) reported slower responses for target stimuli that were accompanied by a non-target distractor (A^+V^-), compared to single targets (A^+).

An interesting experimental solution to this problem has been implemented by Grice, Canham and Boroughs (1984). In addition to Go- and Nogo stimuli, Grice et al. introduced a neutral stimulus (0) in each modality, yielding three target combinations (A^+V^0 , A^+V^+ , A^0V^+), and three non-target combinations (A^-V^0 , A^-V^- , A^0V^-). Note that the neutral stimulus was always paired with either a target or a non-target, so there were no ambiguous combinations such as A^0 , V^0 , or A^0V^0 . When comparing A^+V^+ (redundant condition) to A^+V^0 and A^0V^+ (single target conditions), the intensity of the stimulation is kept constant in all conditions, and response conflicts in the unisensory conditions are avoided (e.g., Blurton et al., 2014; Feintuch & Cohen, 2003). For choice reaction tasks with two response alternatives, the design is identical, with the “-”-stimuli being associated with the second response alternative.

In Go/Nogo tasks or choice reaction tasks, the tendency to anticipate might be reduced; nevertheless, participants might still be tempted to produce “uninformed” responses (i.e., guess the correct response). Because of the multiple response alternatives, the kill-the-twin correction is slightly more complicated in Go/Nogo and choice response tasks. For the above setup with A^+V^+ , A^+V^0 , and A^0V^+ as Go trials, the overall tendency to give an uninformed Go-response can be estimated by the false alarm rates in A^-V^- , A^-V^0 , and A^0V^- , respectively. This yields the following corrected inequality (see the original article by Eriksen, 1988, for a derivation and justification),

$$[F_{A^+V^+}(t) - F_{A^-V^-}(t)] \leq [F_{A^+V^0}(t) - F_{A^-V^0}(t)] + [F_{A^0V^+}(t) - F_{A^0V^-}(t)], \text{ for all } t. \quad (10)$$

Omitting the kill-the-twin correction can again bias the test in favor of the race model.

RACE MODEL INEQUALITY

1
2
3 *Stimulus onset asynchrony manipulation*—The RMI can be generalized to describe the upper
4 bound for the redundancy gain in stimuli presented with onset asynchrony. For illustration,
5 consider an auditory stimulus that is presented after the visual stimulus with a delay of 100 ms
6 (V100A). The following upper bound can be derived as a generalization of Inequality 8:
7
8
9
10

$$[F_{V100A}(t) - F_C(t)] \leq [F_A(t - 100) - F_C(t - 100)] + [F_V(t) - F_C(t)], \text{ for all } t,$$

11
12
13
14
15
16
17 which is easily seen to simplify to

$$F_{V100A}(t) + F_C(t - 100) \leq F_A(t - 100) + F_V(t), \text{ for all } t. \quad (11)$$

18
19
20
21
22
23
24
25 The expression $F(t - 100) = P(\mathbf{T} \leq t - 100) = P(\mathbf{T} + 100 \leq t)$ implies that 100 ms are added to
26 the RTs observed for A and C, consistent with the delayed onset of the auditory component in
27 V100A (Miller, 1986) and with the shifted correction for fast guesses of the responses to
28 unimodal auditory stimuli (for details, see Ineq. 7 in Gondan & Heckel, 2008).
29
30
31
32
33

34 SOA manipulation is recommended for two reasons: If the RTs for the unimodal
35 stimuli differ a lot, the redundancy gain might be very limited under any cognitive
36 architecture, be it a race model or a coactivation model. If A is processed much faster than V,
37 there is no reason to ‘wait’ for the V stimulus in a redundant signals task. The RMI is not a
38 powerful tool in such a situation. SOA variation might reestablish “physiological synchrony”
39 (Hershenson, 1962), by equalizing the channel-specific processing times. Gondan (2009)
40 provided a solution to the problem of multiple testing that arises from testing multiple SOAs.
41 SOA variation can also be diagnostic regarding the mechanisms involved in coactivation (see
42 Ineqs. 13 and 14 below). Moreover, a number of coactivation models make testable
43 predictions about the relationship between SOA and mean RT (e.g., Diederich, 1995;
44 Diederich & Colonius, 2004; Gondan & Blurton, 2013; Miller & Ulrich, 2003; Ulrich &
45 Miller, 1997; Schwarz, 1989, 1994).
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

RACE MODEL INEQUALITY

1
2
3 *Generalized RMIs*—Townsend and Nozawa (1995) investigated 2×2 factorial experiments in
4
5 which Factor A selectively influences the processing time distribution of Process A, and
6
7 Factor V selectively influences the processing time distribution of Process V (see Dzhamfarov,
8
9 2003, for a formal definition of selective influence and note the equivalence to the assumption
10
11 of context invariance). Consider an experiment in which participants respond to auditory-
12
13 visual stimuli, with the stimulus components being presented in different intensities, for
14
15 example, weak (a, v) and strong (A, V). If the processing time distributions for the different
16
17 levels of the two factors are ordered (e.g., faster processing of A than a, faster processing of V
18
19 than v), Townsend and Nozawa demonstrated that the race model predicts
20
21

$$F_{AV}(t) + F_{av}(t) \leq F_{Av}(t) + F_{aV}(t), \text{ for all } t. \quad (12)$$

22
23
24
25
26
27
28
29
30 Inequality 12 is easily seen to be a generalization of the RMI with kill-the-twin correction.
31
32 Inequality 8 results when the intensity of the weak stimuli is zero. The generalization is
33
34 important for two reasons: First, it allows for much more experimental flexibility because the
35
36 basic setup (A, V, AV, catch trial) is being extended to a more realistic setting which includes
37
38 only redundant stimuli. For example, in multisensory research, it is much more realistic to
39
40 study the details of speech integration with audio-visual speech samples instead of comparing
41
42 “natural” AV stimuli to “artificial” samples of A and V (e.g., Chandrasekaran et al., 2011).
43
44

45
46 Even more importantly, Townsend and Nozawa derived predictions for the sign of the
47
48 interaction contrast $F_{AV}(t) + F_{av}(t) - F_{Av}(t) - F_{aV}(t)$ not only for the race model, but also for
49
50 other architectures including serial self-terminating models, serial exhaustive models, parallel
51
52 exhaustive models and coactivation models. Applying the technique of Townsend and
53
54 Nozawa (1995), Gondan and Blurton (2013) derived similar predictions for stimuli presented
55
56 with onset asynchrony and derived a further generalization of the RMI. Let AV and 100AV
57
58 denote synchronous stimuli presented at $t = 0$ and 100 ms after the “usual” stimulus onset (the
59
60

RACE MODEL INEQUALITY

meaning of this depends on the specific experiment), and A100V and V100A denote asynchronous stimuli. Then, under the usual assumptions, the race model predicts

$$F_{AV}(t) + F_{100AV}(t) \leq F_{A100V}(t) + F_{V100A}(t), \text{ for all } t. \quad (13)$$

When the onset asynchrony is increased further and further, Inequality 13 converges again to the RMI with kill-the-twin correction (Ineq. 8). Again, predictions can be derived for the sign of the interaction contrast $F_{AV}(t) + F_{100AV}(t) - F_{A100V}(t) - F_{V100A}(t)$ for several processing architectures (serial, parallel, coactive, summarized in Gondan & Blurton, 2013).

This list is necessarily non-exhaustive and mainly reflects the authors' experience and personal taste. Other very promising approaches exist that acquire response force, RTs for bimanual responses, and get important insights by manipulating the contingencies between the stimulus components (e.g., Diederich & Colonius, 1987; Giray & Ulrich, 1993; Miller, 1991; Mordkoff & Yantis, 1991, 1993).

When the race model fails...

We have shown above that the RMI is a direct consequence of a parallel, first-terminating model (i.e., race model) and the assumption of context invariance. Violation of Inequality 8 or 10 indicates that either the race model is wrong, or the context invariance assumption is untenable, or both. In many studies violation of the RMI is considered as evidence for the validity of "the coactivation model" which assumes integrated processing of the redundant information. Because of the great variety of coactivation models, this line of reasoning is incomplete as long as the specific mechanism of integration is not specified and tested.

Since Miller (1982), a number of coactivation models have been developed. Some of these models are very general (e.g., Miller, 1986, Eq. 3) while others predict specific shapes

RACE MODEL INEQUALITY

of the RT distribution (e.g., Otto & Mamassian, 2012). In the following we list an incomplete set of candidates that might be considered if the race model has been shown to fail, and the researcher is interested in what happened instead. It is very likely that there is no universal coactivation model that accounts for the redundancy gains observed in all the studies of the field—studies that differ with respect to stimuli, task demands, and participants.

In the history-free “exponential” coactivation model (Miller, 1986, Ineq. 3) stimulus detection occurs spontaneously, in an all-or-none fashion, comparable to the spontaneous decay of a radioactive particle. In the bimodal stimulus, detection is assumed to occur at a higher rate, such that the expected detection time is shorter than the detection time for unimodal stimuli. What happens with asynchronous stimuli (e.g., V100A)? Miller argued that in the exponential coactivation model, detection of the asynchronous signal V100A occurs at the same rate as for V, for the first 100 ms. Starting at 100 ms after stimulus onset, both stimuli are active, and detection occurs at the increased bimodal detection rate. This is comparable to a race of V and a delayed AV, with the visual racer being stopped at 100 ms, so that $\mathbf{D}_{V100A} \geq \min(\mathbf{D}_V, \mathbf{D}_{AV} + 100)$. The following upper limit is derived (note F_{AV} instead of F_A on the right side of the inequality),

$$F_{V100A}(t) + F_C(t - 100) \leq F_V(t) + F_{AV}(t - 100), \text{ for all } t,^2 \quad (14)$$

Violation of the upper bound defined by (14) rules out history-free coactivation models in favor of accumulator models in which sensory evidence is collected over time.

Specific examples of such accumulator models are the Poisson counter and diffusion superposition models proposed by Diederich (1995) and Schwarz (1989, 1994), and the parallel grains model (Miller & Ulrich, 2003). In the counter superposition model (Schwarz,

² Miller (1986) did not include a kill-the-twin correction, so his Inequality 3 does not include the F_C term. Because the kill-the-twin correction can be shown to hold for a standard race model for asynchronous stimuli (Gondan & Heckel, 2008), and because in the exponential coactivation model $F_{V100A}(t)$ can only decrease in comparison to the standard race model, the correction term is justified.

RACE MODEL INEQUALITY

1
2
3 1989), buildup of sensory evidence is conceived as a series of impulses with independent,
4 exponentially distributed intervals between two impulses. Detection occurs as soon as a
5 criterion of $c > 1$ impulses has been registered. In bimodal targets, the impulses are pooled in
6 a common channel (linear superposition). As a consequence, the criterion is reached earlier,
7 which causes the redundancy gain. Schwarz (1989, Figure 1) showed that the model
8 accurately predicts the mean RTs for speeded manual responses to auditory-visual stimuli
9 with different onset asynchronies (see discussion in Diederich & Colonius, 1991 and
10 Schwarz, 1994). In the diffusion superposition model (Diederich, 1995; Schwarz, 1994),
11 buildup of sensory evidence is conceived as a time-homogeneous diffusion process with drift.
12 Again, detection occurs when a criterion $c > 0$ is reached for the first time. In bimodal stimuli,
13 the activation of the two channels is pooled and the criterion is again reached earlier. Schwarz
14 (1994) demonstrated that the diffusion superposition model accurately describes the means
15 and variances of the RTs at different SOAs reported by Miller (1986). In the parallel grains
16 model (Miller & Ulrich, 2003) buildup of sensory evidence is described by a discrete
17 accumulation of information. Similar to Schwarz' (1989) model, in auditory-visual stimuli,
18 the contributions of both sensory channels are pooled, so that a criterion of c impulses is
19 reached earlier than in single signals. Prediction of the mean RTs in the standard redundant
20 signals experiment seems to be quite satisfactory (Miller & Ulrich, 2003, Fig. 7 and 8).
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42

43 A second class of coactivation models keeps the assumption of a race between
44 channels (Eq. 1), but instead drops the notion of context invariance (Eq. 4): For illustration,
45 consider a minimalistic redundant signals task with 1/3 A stimuli, 1/3 V stimuli, and 1/3 AV
46 stimuli. The prior probability for a stimulus in the auditory modality is then 2/3, because 2 out
47 of the 3 experimental conditions include an auditory component. If, however, a visual
48 stimulus is presented, the posterior probability for an auditory stimulus is decreased to 1/2,
49 because 1 out of 2 conditions that include a visual component also includes an auditory
50 component. Mordkoff and Yantis (1991) systematically manipulated such contingencies as
51
52
53
54
55
56
57
58
59
60

RACE MODEL INEQUALITY

1
2
3 well as contingencies of the response relevance of the different channels in a Go/Nogo task
4
5 (e.g., with the auditory component predicting a target in the visual channel). The pattern of
6
7 results indicated that the system adapts to such contingencies by excitatory interactions if the
8
9 posterior probability is greater than the prior probability, and inhibitory interactions in the
10
11 opposite case. Mordkoff and Yantis called the model an “interactive race model”.
12

13
14 In a recent approach, Otto and Mamassian (2012) investigated audio-visual
15
16 redundancy gains with a special focus on sequence effects. Effects of the stimulus sequence
17
18 have also been reported by Miller (1986, Table 4), Gondan et al. (2004) and Van der Stoep et
19
20 al. (2015). Whereas Miller and Gondan et al. basically tested the RMI in subgroups of stimuli
21
22 (e.g., only stimuli that follow an A trial, see above), Otto and Mamassian explicitly modeled
23
24 the effects of the stimulus sequence. They then demonstrated that the race mechanism can
25
26 explain the redundancy gain when allowing for increased noise in the system in bimodal
27
28 stimuli. For further examples and taxonomies see Ulrich and Miller (1997), Colonius and
29
30 Townsend (1997) and Townsend and Nozawa (1997).
31
32
33
34
35
36
37
38

Current practice

39 To outline the current practice of testing the RMI, a review from 2011 to 2014 was conducted
40
41 on research articles that cited Miller’s 1982 paper (Google Scholar and ISI Web of Science).
42
43 This yielded 181 papers, wherein 98 (54%) articles cited the redundant signals effect but did
44
45 not explicitly utilize or test a race model. The methods of the remaining 83 studies in which
46
47 the RMI is tested are summarized in Figure 2.
48

49
50 Out of the 83 articles that tested a race model, 77 (93%) papers claimed to have
51
52 obtained a violation of the RMI. Yet, out of the 83 articles reviewed, only 9 (11%) papers
53
54 tested a coactivation model to describe and predict their data. Surprisingly, only 58 of these
55
56 83 studies (70%) did some kind of statistical analysis, mostly percentile-specific *t*-tests, with
57
58 9 (10%) studies not correcting for multiple testing at all, and 23 studies (28%) using an overly
59
60

RACE MODEL INEQUALITY

1
2
3 conservative Bonferroni correction. Only 4 out of 83 studies (5%) used a permutation test that
4
5 allows for an adequate Type I error control while preserving statistical power. In a
6
7 surprisingly high number of studies (24 of 83), it was claimed that the race model inequality
8
9 or “Miller inequality” was tested, but these studies actually used the so-called independent
10
11 race model (Eq. 7), which results if the channel processing times are assumed to be
12
13 stochastically independent. The shortcomings of this additional assumption were only
14
15 discussed in 2 (3%) out of 83 of these studies.
16
17

18
19 None of the studies (0%) explicitly incorporated a procedure that would account for
20
21 omitted responses in the distribution functions. Fifty-seven (69%) studies ignored misses by
22
23 excluding them from the analyses. The other 26 studies (31%) did not mention how misses
24
25 were treated in the analysis. Most articles had *a priori* defined cutoff boundaries for the RT
26
27 distributions and fast guesses and misses were not accounted for in the distribution functions.
28
29 When plots of the distribution functions were given, the plots were rescaled such that $\hat{G}(t)$
30
31 was 0% at the lower cutoff boundary and 100% at the upper cutoff boundary, which indicates
32
33 that omitted responses and other problematic behavior were simply excluded. Only 7 out of
34
35 the 83 studies (8%) did run a kill-the-twin procedure, which corrects the distribution functions
36
37 from becoming artificially larger; in the other studies, the kill-the-twin procedure was not
38
39 mentioned (and probably not performed).
40
41
42

43
44 Seventy-nine (95%) out of the 83 studies implemented an intermixed presentation of
45
46 their experimental stimuli (instead of presenting the visual, auditory and audio-visual stimuli
47
48 in separate blocks). Although exponentially distributed foreperiods have already been
49
50 recommended by the seminal book on reaction times by Luce (1986), only three articles
51
52 implemented this timing procedure (4%). Fifty studies (60%) sampled from uniform
53
54 distributions instead, and 23 studies (28%) used a constant foreperiod.
55

56
57 This short review is intended to underline the need for careful study design and data
58
59 analysis in research on redundant signals effects. Some of the aspects summarized in Figure 2
60

RACE MODEL INEQUALITY

can be considered to be specific to redundant signals tasks and to testing the RMI, but others are equally applicable to other RT experiments and analyses (e.g., random foreperiods and stimulus sequences, careful justification for data cleaning procedures routinely applied in RT research). Researchers should be aware that wrong or inefficient methodology may yield biased results (e.g., anticonservative decisions if issues of multiple testing are not taken serious, loss of power if the kill-the-twin correction is not performed) and may lead to wrong conclusions.

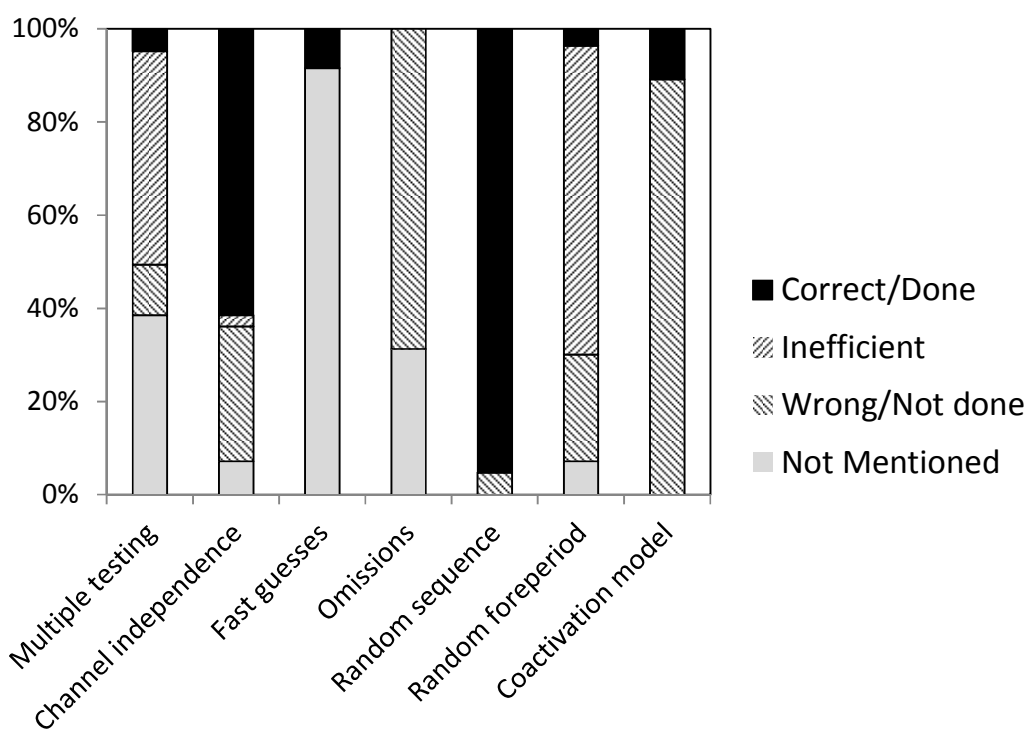


Figure 2.

Current practice of RMI testing within 2010–2014. Only a few studies handled issues of multiple testing appropriately, and nearly all studies estimated the RT distributions involved in the RMI in an incorrect way. Many studies tested the “independent” race model instead of Miller’s (1982) inequality. The study designs generally met the requirements for context invariance. Although the RMI is violated in many studies, coactivation models are rarely investigated.

*RACE MODEL INEQUALITY***Discussion**

Hypothesis tests in RT studies in Experimental Psychology most often refer to differences in the mean RTs observed under two experimental conditions. Redundant signals tasks differ from this standard setup: (A) The test of the RMI refers to a comparison of three instead of two experimental conditions. (B) Hypotheses refer to cumulative RT distributions instead of mean RTs. (C) The violation of the RMI does not automatically support a specific theory.

As a consequence of (A), the assumptions of standard data cleaning procedures are not automatically met. There are experimental paradigms in which standard data cleaning procedures yield improved estimates and valid inference. In redundant signals tasks, matters are more complicated. Biases induced by errors and outliers cannot simply be removed by removing the errors and outliers from the analysis. Even in standard experiments comparing the “mean correct RT” between two experimental conditions, exclusion of fast responses, omitted responses and outliers is often based on common sense arguments and *ad hoc* considerations of statistical power (e.g., Ratcliff, 1993). When the null hypothesis states that “behavior” is equal under two experimental conditions, this statement is easily seen to translate to the hypothesis of equal “mean correct RTs”. In contrast, because of the asymmetry of the RMI and the probabilities involved, conventional error removal and other *ad hoc* data cleaning procedures may cause bias (Eriksen, 1988; Miller, 2004). Especially in experiments with simple reaction time tasks it is advisable to include a condition with catch trials. Catch trials reduce the tendency for fast guesses and allow researchers to perform a kill-the-twin correction by applying Inequality 8. For Go/Nogo tasks or choice response tasks, corresponding kill-the-twin schemes can be developed that basically result in Inequality 10 (e.g., Blurton et al., 2014; Gondan, Götze & Greenlee, 2010). In general, errors, omissions and outliers are an integral part of RT experiments.

Problems of multiple testing arise as a consequence of (B) because the RMI is predicted to hold for all t , thus, violations might occur at any t . Although it is obvious that

RACE MODEL INEQUALITY

1
2
3 testing at multiple time points leads to an accumulation of Type I errors (see also Kiesel et al.,
4
5 2007), many of the reviewed studies did not account for multiple testing. Other studies used
6
7 standard procedures for Type I error control (i.e., the Bonferroni procedure), which assume
8
9 the worst case of negatively correlated significance tests. For the test of the RMI, however,
10
11 the tests at multiple time points or quantiles are positively correlated. If the test is significant
12
13 at time point t , it is probably also significant in close proximity to t . Therefore, we
14
15 recommend using the permutation test for the RMI (Gondan, 2010). A permutation test that
16
17 also includes the kill-the-twin correction is provided in the online supplement to this article.
18
19

20
21 When the RMI fails, which mechanism can account for the observed results? A
22
23 number of coactivation models have been proposed that can be broadly classified into
24
25 context-invariant models that assume different mechanisms of integration (e.g., superposition
26
27 models) and the so-called interactive race models that drop the assumption of context-
28
29 invariance. The superposition models proposed by Diederich (1995), Schwarz (1989, 1994)
30
31 and by Miller and Ulrich (2003, Section 6) are all based on additive superposition of activity
32
33 in the two channels. In line with this, models of neural integration sites predict that integration
34
35 of complex information is optimal if the signals arising from different sources are additively
36
37 integrated (Denève, Latham, & Pouget, 2001). This is in remarkable contrast to the
38
39 conventional definition of multisensory brain regions that underlines the special role of
40
41 “superadditive” responses (e.g., Wallace, Meredith, & Stein, 1992; see Stevenson et al., 2014,
42
43 for a discussion). Given that a number of phenomena can be explained with additive
44
45 superposition, it seems worth considering them in future investigations of behavior and neural
46
47 firing (e.g., Stanford, Quessy & Stein, 1995).
48
49
50

51
52
53
54 *Summary.* Testing the RMI should follow the following recommendations: (A) The RMI
55
56 should be tested at multiple time points. A permutation test should be used to control the
57
58 significance level in these multiple tests. (B) Data cleaning should be avoided. Outliers and
59
60

RACE MODEL INEQUALITY

omitted responses should not be eliminated. Erroneous responses should not be eliminated from the data either. The kill-the-twin correction should be applied instead; in other words, Inequality 8 (simple response tasks) or 10 (Go/Nogo or choice response tasks) should be tested. (C) When the race model fails, coactivation models should be considered.

Supplementary Material A

Three R scripts (R Core Team, 2015) with permutation tests for Inequalities 6, 8, 10 in a group of participants.

Supplementary Material B

A review from 2011 to 2014 was conducted on research articles that cited Miller's 1982 paper (Google scholar). This yielded 181 papers, out of which 98 (54%) articles mentioned the redundant signals effect but did not test a race model in their work. The methodology of the other 83 studies that tested the RMI is summarized in Supplement B.

References

- Bahadur, R. R. (1966). A note on quantiles in large samples. *Annals of Mathematical Statistics*, 37, 577–580.
- Blair, R. C., & Karninski, W. (1993) An alternative method for significance testing of waveform difference potentials. *Psychophysiology*, 30, 518–524.
- Blurton, S. P., Greenlee, M. W., & Gondan, M. (2014). Multisensory processing of redundant information in go/no-go and choice responses. *Attention, Perception & Psychophysics*, 76, 1212–1233.

RACE MODEL INEQUALITY

- 1
2
3 Chandrasekaran, C., Lemus, L., Ghazanfar, A. A., Trubanova, A., & Gondon, M. (2011).
4
5 Monkeys and humans share a common computation for face/voice integration. *PLoS*
6
7 *Computational Biology*, 7, e1002165.
8
9
10 Colonius, H., & Diederich, A. (2006). The race model inequality: interpreting a geometric
11
12 measure of the amount of violation. *Psychological Review*, 113, 148–154.
13
14 Corballis, M. C. (2002). Hemispheric interactions in simple reaction time. *Neuropsychologia*,
15
16 40, 423–434.
17
18 Colonius, H., & Townsend, J. T. (1997). Activation-state representation of models for the
19
20 redundant-signals-effect. In A. A. J. Marley (Ed.). *Choice, Decision and*
21
22 *Measurement*. New York: Erlbaum (pp. 245–254).
23
24
25 Denève, S., Latham, P., & Pouget, A. (2001). Efficient computation and cue integration with
26
27 noisy population codes. *Nature Neuroscience*, 4, 826–831.
28
29
30 Diederich, A. (1995). Intersensory facilitation of reaction time: Evaluation of counter and
31
32 diffusion coactivation models. *Journal of Mathematical Psychology*, 39, 197–215.
33
34 Diederich, A., & Colonius, H. (1987). Intersensory facilitation in the motor component ? A
35
36 reaction time analysis. *Psychological Research*, 49, 23–29.
37
38
39 Diederich, A., & Colonius, H. (1991). A further test of the superposition model for the
40
41 redundant-signals effect in bimodal detection. *Perception & Psychophysics*, 50, 83–
42
43 86.
44
45 Colonius, H., & Diederich, A. (2004). Multisensory interaction in saccadic reaction time: a
46
47 time-window-of-integration model. *Journal of Cognitive Neuroscience*, 16, 1000–
48
49 1009.
50
51
52 Dzhafarov, E. N. (2003). Selective influence through conditional independence.
53
54 *Psychometrika*, 68, 7–25.
55
56
57
58
59
60

RACE MODEL INEQUALITY

- 1
2
3 Dzhafarov, E. N., Schweickert, R., & Sung, K. (2004). Mental architectures with selectively
4
5 influenced but stochastically independent components, *Journal of Mathematical*
6
7 *Psychology*, 48, 51–64.
8
9
10 Eriksen, C. E. (1988). A source of error in attempts to distinguish coactivation from separate
11
12 activation in the perception of redundant targets. *Perception & Psychophysics*, 44,
13
14 191–193.
15
16 Feintuch, U., & Cohen, A. (2002). Visual attention and coactivation of response decisions for
17
18 features from different dimensions. *Psychological Science*, 13, 361–369.
19
20
21 Fournier, L. R., & Eriksen, C. W. (1990). Coactivation in the perception of redundant targets.
22
23 *Journal of Experimental Psychology: Human Perception and Performance*, 16, 538–
24
25 550.
26
27
28 Giray, M., & Ulrich, R. (1993). Motor coactivation revealed by response force in divided and
29
30 focused attention. *Journal of Experimental Psychology: Human Perception and*
31
32 *Performance*, 19, 1278–1291.
33
34
35 Gondan, M. (2009). Testing the race inequality in redundant stimuli with variable onset
36
37 asynchrony. *Journal of Experimental Psychology: Human Perception and*
38
39 *Performance*, 35, 257–259.
40
41
42 Gondan, M. (2010). A permutation test for the race model inequality. *Behavior Research*
43
44 *Methods*, 42, 23–28.
45
46
47 Gondan, M., & Blurton, S. P. (2013). Generalizations of the race model inequality.
48
49 *Multisensory Research*, 26, 95–122.
50
51
52 Gondan, M., & Heckel, A. (2008). Testing the race inequality: A simple correction procedure
53
54 for fast guesses. *Journal of Mathematical Psychology*, 52, 320–323.
55
56
57 Gondan, M., Götze, C., & Greenlee, M. W. (2010). Redundancy gains in simple responses
58
59 and go/no-go tasks. *Attention, Perception & Psychophysics*, 72, 1692–1709.
60

RACE MODEL INEQUALITY

- 1
2
3 Gondan, M., Lange, K., Rösler, F., & Röder, B. (2004). The redundant target effect is affected
4
5 by modality switch costs. *Psychonomic Bulletin & Review*, *11*, 307–313.
6
7 Gondan, M., Niederhaus, B., Rösler, F., & Röder, B. (2005). Multisensory processing in the
8
9 redundant-target effect: An event-related potential study. *Perception & Psychophysics*,
10
11 *67*, 713–726.
12
13
14 Grice, G. R., & Canham, L. (1990). Redundancy phenomena are affected by response
15
16 requirements. *Perception & Psychophysics*, *48*, 209–213.
17
18 Grice, G. R., Canham, L., & Boroughs, J. M. (1984). Combination rule for redundant
19
20 information in reaction time tasks with divided attention. *Perception & Psychophysics*,
21
22 *35*, 451–463.
23
24
25 Grice, G. R., Canham, L., & Gwynne, J. W. (1984). Absence of a redundant-signals effect in a
26
27 reaction time task with divided attention. *Perception & Psychophysics*, *36*, 565–570.
28
29
30 Grice, G. R., & Reed, J. M. (1992). What makes targets redundant? *Perception &*
31
32 *Psychophysics*, *51*, 437–442.
33
34 Mozolic, J. L., Hugenschmidt, C. E., Peiffer, A. M., & Laurienti, P. J. (2008). Modality-
35
36 specific selective attention attenuates multisensory integration. *Experimental brain*
37
38 *research*, *184*(1), 39–52.
39
40
41 Hyndman, R. J., & Fan, Y. (1996). Sample quantiles in statistical packages. *American*
42
43 *Statistician*, *50*, 361–365.
44
45
46 Kiesel, A., Miller, J., & Ulrich, R. (2007). Systematic biases and Type I error accumulation in
47
48 tests of the race model inequality. *Behavioral Research Methods*, *39*, 539–551.
49
50
51 Hershenson, M. (1962). Reaction time as a measure of intersensory facilitation. *Journal of*
52
53 *Experimental Psychology*, *63*, 289–293.
54
55
56 Luce, R. D. (1986). *Response times. Their role in inferring mental organization*. New York:
57
58 Oxford University Press.
59
60

RACE MODEL INEQUALITY


- 1
2
3 Maris, G., & Maris, E. (2003). Testing the race model inequality: A nonparametric approach.
4
5 *Journal of Mathematical Psychology*, 47, 507–514.
6
7 Miller, J. (1982). Divided attention: Evidence for coactivation with redundant signals.
8
9 *Cognitive Psychology*, 14, 247–279.
10
11 Miller, J. (1986). Timecourse of coactivation in bimodal divided attention. *Perception &*
12
13 *Psychophysics*, 40, 331–343.
14
15 Miller, J. (1991). Channel interaction and the redundant-targets effect in bimodal divided
16
17 attention. *Journal of Experimental Psychology: Human Perception and Performance*,
18
19 17, 160–169.
20
21 Miller, J. (2004). Exaggerated redundancy gain in the split brain: A hemispheric coactivation
22
23 account. *Cognitive Psychology*, 49, 118–154.
24
25 Miller, J., & Adam, J. J. (2006). Redundancy gain with static versus moving hands: A test of
26
27 the hemispheric coactivation model. *Acta Psychologica*, 122, 1–10.
28
29 Miller, J., & Lopes, A. (1991). Bias produced by fast guessing in distribution-based tests of
30
31 race models. *Perception & Psychophysics*, 50, 584–590.
32
33 Miller, J., & Ulrich, R. (2003). Simple reaction time and statistical facilitation. A parallel
34
35 grains model. *Cognitive Psychology*, 46, 101–151.
36
37 Mordkoff, J. T., & Yantis, S. (1991). An interactive race model of divided attention. *Journal*
38
39 *of Experimental Psychology: Human Perception and Performance*, 17, 520–538.
40
41 Mordkoff, J. T., & Yantis, S. (1993). Dividing attention between color and shape: Evidence of
42
43 co-activation. *Perception & Psychophysics*, 53, 357–366.
44
45 Nickerson, R. S. (1973). Intersensory facilitation of reaction time: Energy summation or
46
47 preparatory enhancement. *Psychological Review*, 80, 489–509.
48
49 Ollman, R. (1966). Fast guesses in choice reaction time. *Psychonomic Science*, 6, 155–156.
50
51 Otto, T. U., & Mamassian, P. (2012). Noise and correlations in parallel perceptual decision
52
53 making. *Current Biology*, 22, 1391–1396.
54
55
56
57
58
59
60

RACE MODEL INEQUALITY


- 1
2
3 Pesarin, F. (2001). *Multivariate Permutation Tests With Applications in Biostatistics*. New
4
5 York: Wiley.
6
7 Posner, M. I., Nissen, M. J., & Klein, R. M. (1976). Visual dominance: An information-
8
9 processing account of its origins and significance. *Psychological Review*, 83, 157–171.
10
11 R Core Team (2015). *R: A language and environment for statistical computing*. Vienna: R
12
13 Foundation for Statistical Computing.
14
15
16 Raab, D. H. (1962). Statistical facilitation of simple reaction times. *Transactions of the New*
17
18 *York Academy of Sciences*, 24, 574–590.
19
20
21 Ratcliff, R. (1993). Methods for dealing with reaction-time outliers. *Psychological Bulletin*,
22
23 114, 510–532.
24
25 Schröger, E., & Widmann, A. (1998). Speeded responses to audiovisual signal changes result
26
27 from bimodal integration. *Psychophysiology*, 35, 755–759.
28
29 Schröter, H., Ulrich, R., & Miller, J. (2007). Effects of redundant auditory stimuli on reaction
30
31 time. *Psychonomic Bulletin & Review*, 14, 39–44.
32
33 Schwarz, W. (1989). A new model to explain the redundant signals effect. *Perception &*
34
35 *Psychophysics*, 46, 498–500.
36
37 Schwarz, W. (1994). Diffusion, superposition, and the redundant targets effect. *Journal of*
38
39 *Mathematical Psychology*, 38, 504–520.
40
41 Spence, C., Nicholls, M. E., & Driver, J. (2001). The cost of expecting events in the wrong
42
43 sensory modality. *Perception & Psychophysics*, 63, 330–336.
44
45
46 Stanford, T. R., Quessy, S., & Stein, B. E. (2005). Evaluating the operations underlying
47
48 multisensory integration in the cat superior colliculus. *Journal of Neuroscience*, 25,
49
50 6499–6508.
51
52
53 Teder-Sälejärvi, W. A., McDonald, J. J., Di Russo, F., & Hillyard, S. A. (2002). An analysis
54
55 of audio-visual crossmodal integration by means of event-related potential (ERP).
56
57 recordings. *Cognitive Brain Research*, 14, 106–114.
58
59
60

RACE MODEL INEQUALITY

- 1
2
3 Todd, J. W. (1912). Reaction to multiple stimuli. *Archives of Psychology*, 25, 1–65.
- 4
5 Townsend, J. T., & Ashby, F. G. (1983). *Stochastic modeling of elementary psychological*
6
7 *processes*. New York: Cambridge University Press.
- 8
9 Townsend, J. T., & Nozawa, G. (1995). Spatio-temporal properties of elementary perception:
10
11 An investigation of parallel, serial, and coactive theories. *Journal of Mathematical*
12
13 *Psychology*, 39, 321–359.
- 14
15 Townsend, J. T., & Nozawa, G. (1997). Serial exhaustive models can violate the race model
16
17 inequality: implications for architecture and capacity. *Psychological Review*, 104,
18
19 595–602.
- 20
21 Ulrich, R., & Miller, J. (1997). Tests of race models for reaction time in experiments with
22
23 asynchronous redundant signals. *Journal of Mathematical Psychology*, 41, 367–381.
- 24
25 Ulrich, R., Miller, J., & Schröter, H. (2007). Testing the race model inequality: An algorithm
26
27 and computer programs. *Behavioral Research Methods*, 39, 291–302.
- 28
29 Van der Stoep, N., Van der Stigchel, S., & Nijboer, T. C. W. (2015). Exogenous spatial
30
31 attention decreases audiovisual integration. *Attention, Perception, & Psychophysics*,
32
33 77, 464–482.
- 34
35 Wallace, M. T., Meredith, M. A., & Stein, B. E. (1992). Integration of multiple sensory inputs
36
37 in cat cortex. *Experimental Brain Research*, 91, 484–488.
- 38
39 Yellott, J. I. (1971). Correction for fast guessing and the speed-accuracy trade-off in choice
40
41 reaction time. *Journal of Mathematical Psychology*, 8, 159–199.
- 42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

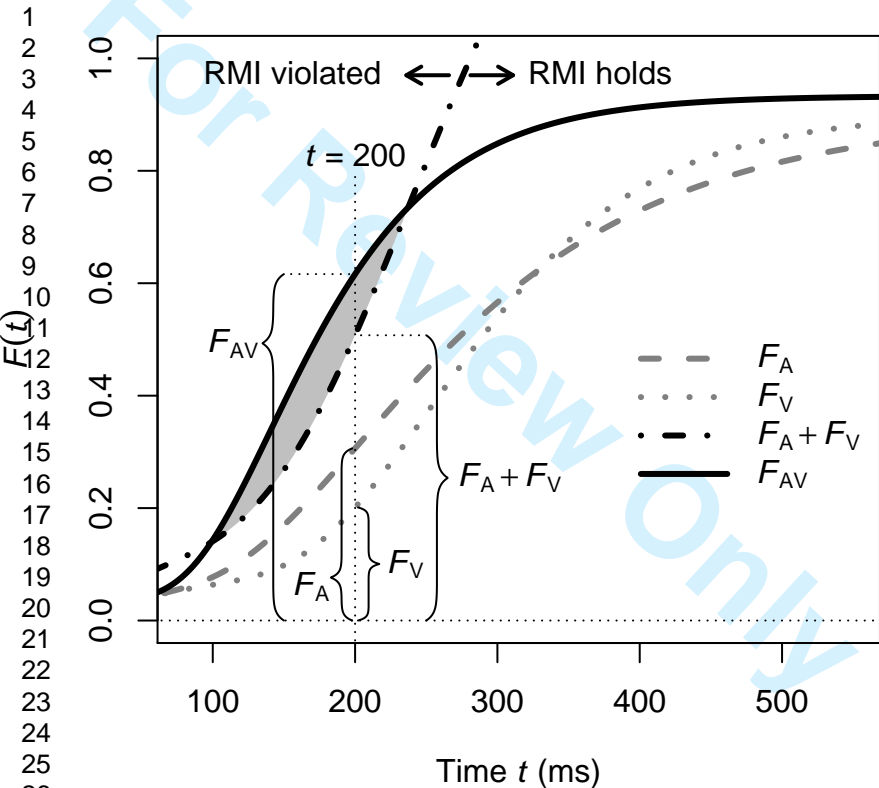

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

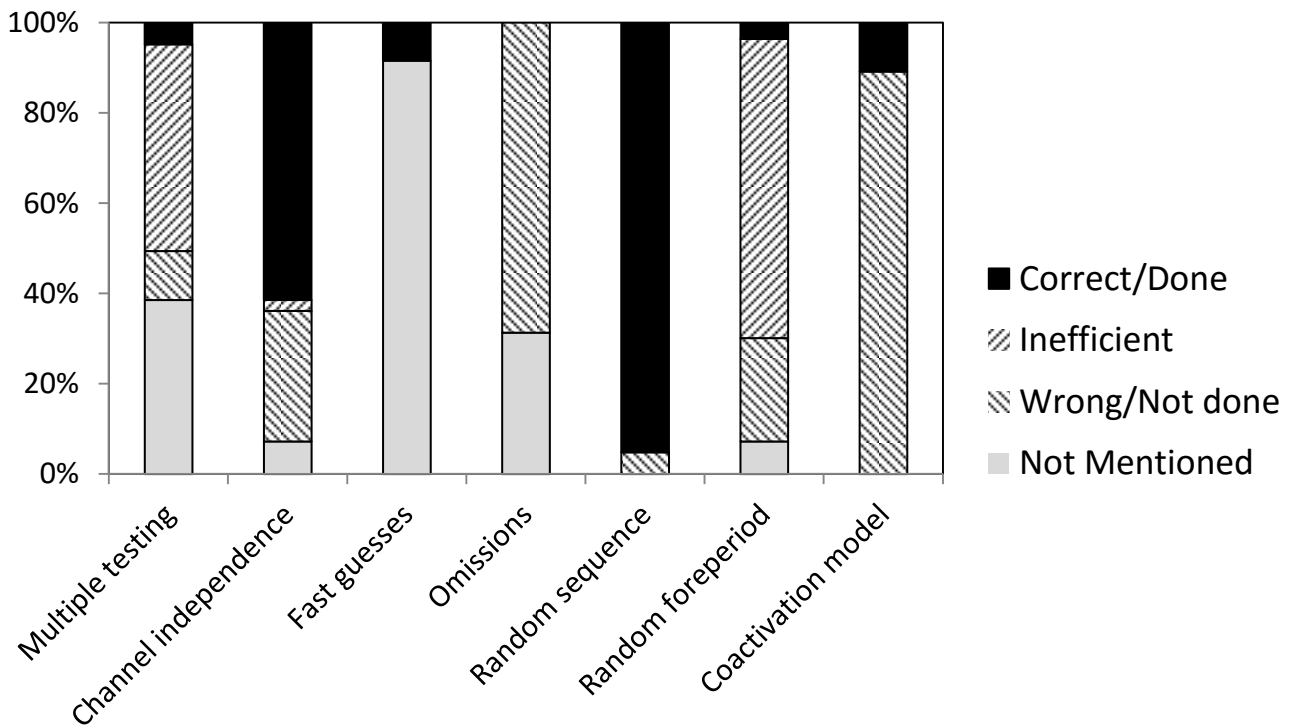

Supplementary Material A

A script in R statistical programming language (R core team, 2015) and usage instructions as well as example data from a simulated redundant signals experiment are provided as supplementary material for *A tutorial on testing the race model inequality*:

- `rmi-ineq6.r`, `rmi-ineq8.r`, `rmi-ineq10.r`: R script for the permutation test for the three inequalities mentioned in the text
- `example-A-V-AV.txt`, `example-A-V-AV-C.txt`, `example-A-V-AV-a-v-av.txt`: ASCII files with example data

The current version of R can be downloaded from <http://www.r-project.org/>

Windows users generally download the binary package of the program. After installation of the program, “Change Dir...” can be chosen from the “File” menu to enter the local folder chosen for the data. The R script is opened by choosing “File/Open Script...” from the menu and then selecting `rmi-ineq6.r`, `rmi-ineq8.r` or `rmi-ineq10.r` which contain the code for the permutation test for Inequalities 6, 8, or 10 of the article, respectively. The scripts include the name of the file to be analyzed (`example-A-V-AV.txt`, `example-A-V-AV-C.txt` and `example-A-V-AV-a-v-av.txt` as defaults, respectively), these names need to be adjusted if necessary. The scripts are executed by “Execute all” from the “Edit” menu in the R environment. The data file should be in tab-delimited ASCII text format and should include the three following columns:

- Obs: observer number
- Cond: experimental condition (Ineq. 6: A, V, AV; Ineq. 8: A, V, AV, C; Ineq. 10: A, V, AV, a, v, av)
- RT: response time in milliseconds, with omitted responses coded as “Inf”

RACE MODEL INEQUALITY (SUPPLEMENT)

S2

The three column names should be included as the header of the results file, thus, the first few lines of a results file for Inequality 8 might look like:

```
Obs Cond  RT
  1   A  245
  1   V  281
  1  AV  212
  1   C  Inf
  1   V  Inf
```

If default options are used, the command `rmiperm` performs a permutation test using the participant-specific quantiles .05, .10, .15, .20, .25, .30, .35, .40, .45 of the response time distribution. By default, 10001 permutations are used to generate the distribution of the t_{\max} statistic under the race model. These defaults can be adjusted using the following arguments:

- `q`: quantiles to be used for the test, default: .05, .10, ..., .45
- `nperm`: number of permutations used for determining the distribution of t_{\max} under the race model. Use an odd number like 1001 or 10001 (default) to avoid P values corresponding exactly to 0.05.

The script returns summary statistics for the different conditions as well as the observed t_{\max} statistic and the one-sided P value of the permutation test. Significant P values indicate a violation of the race model. In the example (`rmi-ineq8.r`) the violation is significant at the one-sided $\alpha = 5\%$ ($t_{\max} = 2.962$, critical $t_{\max}^* = 2.439$, $P = .019$). In addition, the median and mean of the latencies of valid responses are given.

```
$Summary
      A  AV  C  V
Median 241 193 70 253
Mean   267 204 82 262
Detect% 90  95 10  91

$Perm
      tmax crit.95%      P
      2.962      2.439      0.019
```

Supplementary Material B

A review from 2011 to 2014 was conducted on research articles that cited Miller's 1982 paper (Google scholar). This yielded 181 papers, out of which 98 (54%) articles mentioned the redundant signals effect but did not test a race model in their work. The methodology of the other 83 studies that tested the RMI is summarized in the Supplementary Table. The criteria for the review are given below. For each criterion, we defined "best solutions", "inefficient solutions", and solutions we considered wrong (i.e., no consideration of multiple testing).

- 1) Issues of multiple testing: Permutation test (best solution for multiple participants)/Bootstrap procedure (best solution for single participants), Bonferroni correction (inefficient), No control (wrong/not done), Not mentioned or no significance test.
- 2) Channel independence: Test of the race model inequality (best solution), Test of Equation 7 with discussion of the assumption of independent channels (inefficient), Test of Equation 7 without discussion of the assumption (wrong)
- 3) Wrong responses and fast guesses: Kill-the-twin correction (best solution), Excluded (inefficient), Not mentioned
- 4) Omitted responses: Kept in the data (best solution), Excluded (inefficient), Not mentioned
- 5) Stimulus presentation: Random (best solution), Random, but avoiding multiple repetitions (inefficient), Blocked (wrong), Not mentioned
- 6) Foreperiod: Exponentially distributed (best solution), Uniformly distributed (inefficient), Constant (wrong), Not mentioned
- 7) Coactivation model tested: Yes (best solution), No or not mentioned (inefficient)

First Author	Multiple testing	Channel independence	Kill-the-twin	Omitted responses	Presentation	Foreperiod	Coactivation model
<i>2011</i>							
Altieri	No mention	Assumed + discussion	Not done	Excluded	Blocked	No mention	Not tested
Barutchu	<i>t</i> -test	Not assumed	Not done	Excluded	Random	No mention	Not tested
Brandwein	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Chandrasekaran	Bootstrap	Not assumed	Not done	Excluded	Random	Uniform	Tested
Diaconescu	<i>t</i> -test	Not mentioned	Not done	Excluded	Random	Uniform	Not tested
Fiedler	<i>t</i> -test	Not mentioned	Not done	Excluded	Random	No mention	Not tested
Franz	<i>t</i> -test	Not assumed	Not done	No mention	Random	Constant	Not tested
Girard	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Gondan	Non-parametric	Not assumed	Done	No mention	Random	Uniform	Tested
Mahoney	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Mordkoff	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
Mozolic	No mention	Assumed	Not done	Excluded	Random	Constant	Not tested
Poom	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
Rach	Non-parametric	Not assumed	Not done	Excluded	Random	Uniform	Tested
Richards	No mention	Not assumed	Done	Kept	Random	Constant	Not tested
Senkowski	No mention	Assumed	Not done	No mention	Random	Uniform	Not tested
Töllner	<i>t</i> -test	Not assumed	Done	Kept	Random	Uniform	Not tested
Townsend	No mention	Not assumed	Not done	Excluded	Random	Constant	Tested
Winneke	<i>t</i> -test	Assumed	Not done	No mention	Random	Constant	Not tested
Yang	Non-parametric	Not assumed	Not done	No mention	Random	Constant	Not tested
Yang	Non-parametric	Not assumed	Not done	Excluded	Random	Constant	Not tested

First Author	Multiple testing	Channel independence	Kill-the-twin	Omitted responses	Presentation	Foreperiod	Coactivation model
<i>2012</i>							
Brang	<i>t</i> -test	Assumed	Not done	No mention	Random	Uniform	Not tested
Buchholz	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Donnelly	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
Linnet	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Otto	No mention	Assumed + discussion	Not done	Excluded	Exp1: Random Exp2: Blocked	Uniform	Tested
Putzar	Permutation	Not assumed	Done	Included	Random	Constant	Not tested
Roser	No mention	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Stevenson	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Stevenson	Kolmogorov-Smirnoff test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Townsend	No mention	Not assumed	Not done	No mention	Random	Constant	Not tested
Wu	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Wu	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Wuerger	<i>t</i> -test	Not assumed	Not done	Excluded	Random	No mention	Not tested
Yankouskaya	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
<i>2013</i>							
Akyurek	<i>t</i> -test	Not mentioned	Not done	Excluded	Random	Uniform	Not tested
Altieri	No mention	Not assumed	Not done	No mention	Blocked	No mention	Not tested
Atteveldt	<i>t</i> -test	Assumed	Not done	Excluded	Random	Constant	Not tested
Barutchu	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Baumgartner	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Exponential	Not tested
Brandwein	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Brang	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested

First Author	Multiple testing	Channel independence	Kill-the-twin	Omitted responses	Presentation	Foreperiod	Coactivation model
<i>2013 (cont'd)</i>							
Chandrasekaran	Bootstrap	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Charbonneau	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Engmann	No mention	Not assumed	Not done	Excluded	Random	Constant	Tested
Florio	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Girard	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
Lanz	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Leone	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Little	No mention	Not assumed	Not done	Excluded	Random	Constant	Tested
Megevand	Permutation	Not assumed	Done	Kept	Random	Uniform	Not tested
Mercier	No mention	Not mentioned	Not done	Excluded	Random	Uniform	Not tested
Otto	No mention	Assumed	Not done	Excluded	Random	Uniform	Not tested
Perez-Bellido	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Sella	<i>t</i> -test	Not mentioned	Not done	Excluded	Random	Uniform	Not tested
Wang	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Wynn	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Yamani	No mention	Not assumed	Not done	Excluded	Random	Constant	Not tested
Yang	<i>t</i> -test	Not mentioned	Not done	Excluded	Random	Constant	Not tested
Yankouskaya	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49

First Author	Multiple testing	Channel independence	Kill-the-twin	Omitted responses	Presentation	Foreperiod	Coactivation model
<i>2014</i>							
Altieri	<i>t</i> -test	Assumed	Not done	No mention	Random	Uniform	Not tested
Altieri	<i>t</i> -test	Assumed	Not done	No mention	Random	Uniform	Not tested
Andrade	Non-parametric	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Atteveldt	<i>t</i> -test	Assumed	Not done	Excluded	Random	Constant	Not tested
Ben-David	<i>t</i> -test	Assumed	Not done	No mention	Random	Constant	Tested
Blurton	Non-parametric	Not assumed	Done	No mention	Random	Constant	Tested
Boullay	<i>t</i> -test	Assumed	Not done	No mention	Random	Constant	Not tested
Drugowitsch	No mention	Not assumed	Not done	No mention	Random	Exponential	Not tested
Krummenacher	<i>t</i> -test	Not assumed	Done	Excluded	Blocked	Constant	Not tested
Krummenacher	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Constant	Not tested
Lentz	Non-parametric	Assumed	Not done	Excluded	Random	Uniform	Not tested
Mahoney	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Mahoney	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Nava	<i>t</i> -test	Not assumed	Not done	No mention	Random	Uniform	Not tested
Polanen	<i>t</i> -test	Assumed	Not done	Excluded	Random	No mention	Not tested
Pollman	<i>t</i> -test	Not assumed	Not done	No mention	Random	Exponential	Not tested
Pomper	Non-parametric	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Railo	Permutation	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Shepherdson	<i>t</i> -test	Not assumed	Not done	Excluded	Random	Uniform	Not tested
Yang	Non-parametric	Assumed	Not done	Excluded	Random	Constant	Not tested
Yang	Non-parametric	Assumed	Not done	Excluded	Random	Uniform	Not tested
Yang	<i>t</i> -test	Assumed	Not done	Excluded	Random	Uniform	Not tested
Yu	Non-parametric	Assumed	Not done	Excluded	Random	Uniform	Not tested